

The Stealth Reader Gas Meter Interface Unit allows for 2-way communication, migration from Drive-by to Fixed Network mode and fits American and Rockwell Gas Meters.

Hybrid 2-way Drive-by and Fixed Mesh Network

- Allows for Deployment first as drive-by and later upgrade to fixed mesh network using the same meter interfaces/inserts.
- Two-way 902-928MHz FHSS drive-by delivers maximum range and penetration.
- True battery fixed mesh network eliminates the need for towers and AC-powered repeaters.
 - Every meter is also a repeater!
- Fixed mesh network is self-forming and self-healing.
 - Meters automatically discover and join the network.



AMR Capabilities

- Log meter readings hourly or daily even in drive by mode
- Stores up to 1 year of hourly readings and is customizable to 1 minute intervals
- Configurable reporting: hourly, 4 hours, daily, etc.
- Low battery detection, and batteries are easily field replaced at the unit.
- Supports gas meter right sizing, settling usage disputes, Identity of theft and tampering, activity on an inactive account



Meter Compatibility


- American
- Rockwell



Stealth Reader®

Meter Interface

ZENNER
All that counts.

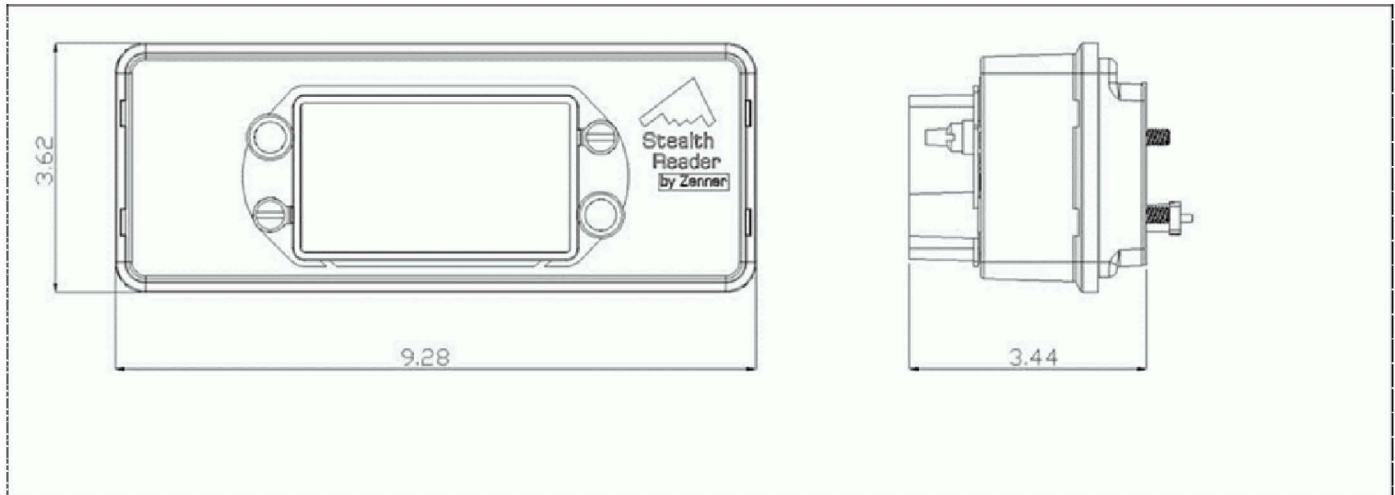

- **Weight 1.5 Pounds with Batteries**
- **Dimension's 9.28" W X 3.44" width X 3.62" High**
- **Batteries, 2 single Lithium-Thionyl Chloride Batteries**
- **Operating Temperature range +85 degrees C to -40 degrees C**
- **All Components sealed against water intrusion**
- **500Mw radio**
- **Composite material is UV protected**
- **Batteries are field replaceable**



MeshPlus
by ZENNER